


SWITCH ASSEMBLY
MS# 6158.8400

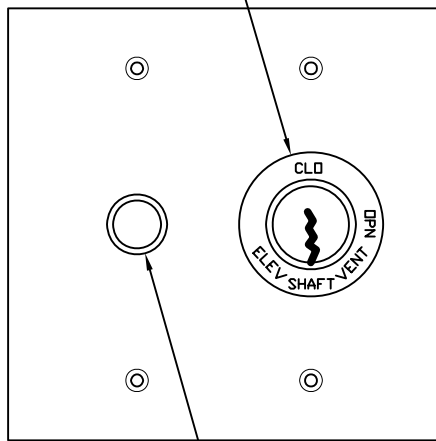

PILOT LIGHT
MS# 6158.5201

2-GANG SS PLATE
MS #6158.5901

Note: Key should only be removable in the "CLD" position.

MOUNT ON MIN. 2 1/2" DEEP BOX

COMPLETED ASSEMBLY
MS# 6158.0650

INSTALL 1/16" THICK WASHER
BETWEEN PLATE AND NUT.
C.S.# 2846.0813 Washer -
Bored out to 3/4" Diameter.

TO MONITOR
MODULE

24V THROUGH
CONTROL MODULE

PILOT LIGHT
MS# 6158.5201

SWITCH ASSEMBLY
MS# 6158.8400

G:\Life Safety (D. Cox)\System Information\Shop Info\Gas & Elev sw's\Elev damper sw plate layout2.dwg

REVISIONS: 2-GANG PLATE, 24V INDICATOR	ELEVATOR SHAFT VENT SWITCH ASSEMBLY DRAWING	APPROVED BY:
COMPLETED:		CHECKED BY:
ISSUED:	FACILITIES PLANNING AND MANAGEMENT IOWA STATE UNIVERSITY	DESIGNED BY: JK
DATE: 01/02/06		SCALE: None
		REQUEST NO.
		SHEET NO. SI - 1